

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number  
**WO 2005/087104 A1**

(51) International Patent Classification: **A61B 5/20**

Paul [GB/GB]; 15 Broadmeadows, Bowburn, Durham  
DH6 5DA (GB).

(21) International Application Number:  
PCT/GB2005/000921

(74) Agent: **ELSWORTH, Dominic**; Hargreaves Elsworth,  
Rotterdam House, 116 Quayside, Newcastle-upon-Tyne  
NE1 3DY (GB).

(22) International Filing Date: 10 March 2005 (10.03.2005)

(25) Filing Language: English

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.

(26) Publication Language: English

(30) Priority Data:  
0405362.5 10 March 2004 (10.03.2004) GB

(71) Applicant (*for all designated States except US*): **UNI-  
VERSITY OF NEWCASTLE UPON TYNE** [GB/GB];  
6 Kensington Terrace, Newcastle upon Tyne NE1 7RU  
(GB).


(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **NEWTON, Douglas**,

[Continued on next page]

(54) Title: **PEAK FLOW MEASUREMENT DEVICE**

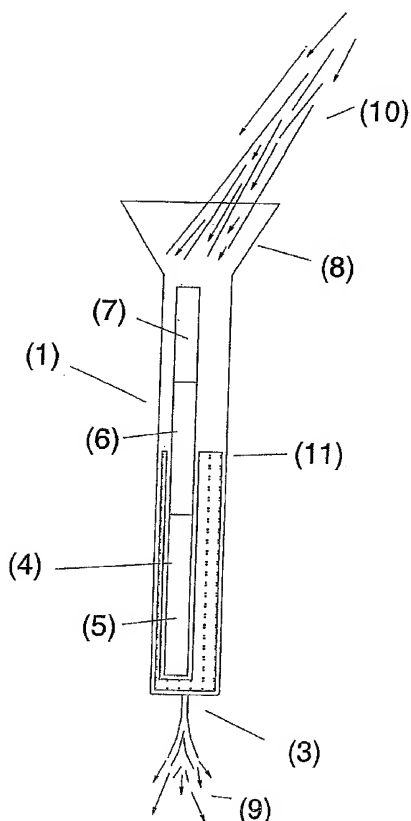

(57) Abstract: A peak flow measurement device comprises a hollow body (1) having an inlet (8) for receiving fluid and an outlet (3), wherein the inlet (8) and outlet (3) are spaced apart from each other, the cross-sectional area of the body being greater than the cross-sectional area of the outlet and wherein in use the device is oriented such that the inlet is above the outlet and the measured peak flow is proportional to the maximum height (11) of fluid within the body.

WO 2005/087104 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*